

jWIN[®]

JS-P601

OPERATION MANUAL

SUBWOOFER SYSTEM 5.1 CHANNEL

ACTIVE 5.1 HOME THEATER SURROUND SYSTEM

COMPOSITION

Wooden cabinet for sub-woofer

1PC

Plastic cabinet for center

1PC

Plastic cabinet for satellite

4PCS

Input cable

3PCS

Instruction manual

1PC

INTRODUCTION

HOME THEATRE SYSTEM

Active Sub-woofer With Satellite Speakers

Operating Manual

Congratulations On Your Purchase!

Your new Home Theater System with active Sub-woofer is designed to deliver maximum enjoyment. Please take a few minutes to read this manual thoroughly. It will explain the features and operation of your unit and help ensure a trouble-free installation.

Unpacking and installation

Please unpack your unit carefully. We recommend that you save the carton and packing material. They will be helpful if you ever need to move your unit or send it for service. To avoid damage, never place the unit near radiators, in front of heating vents, in direct sunlight, in excessively humid places, or near water.

INTRODUCTION

HOME THEATRE SYSTEM

Active Sub-woofer With Satellite Speakers

Operating Manual

Congratulations On Your Purchase!

Your new Home Theater System with active Sub-woofer is designed to deliver maximum enjoyment. Please take a few minutes to read this manual thoroughly. It will explain the features and operation of your unit and help ensure a trouble-free installation.

Unpacking and installation

Please unpack your unit carefully. We recommend that you save the carton and packing material. They will be helpful if you ever need to move your unit or send it for service. To avoid damage, never place the unit near radiators, in front of heating vents, in direct sunlight, in excessively humid places, or near water.

Warning

To prevent fire or shock hazard, do not expose the unit to rain or moisture.

Before connecting the AC cord

Check that the degree of voltage shown on the rear panel matches your local voltage. Adjust the power voltage under your local voltage by the button on the back panel.




This symbol means that the product is double insulated and you do not need an earth connection.



This symbol means that this product keeps to the European safety and electrical interference directives.

CONNECTION

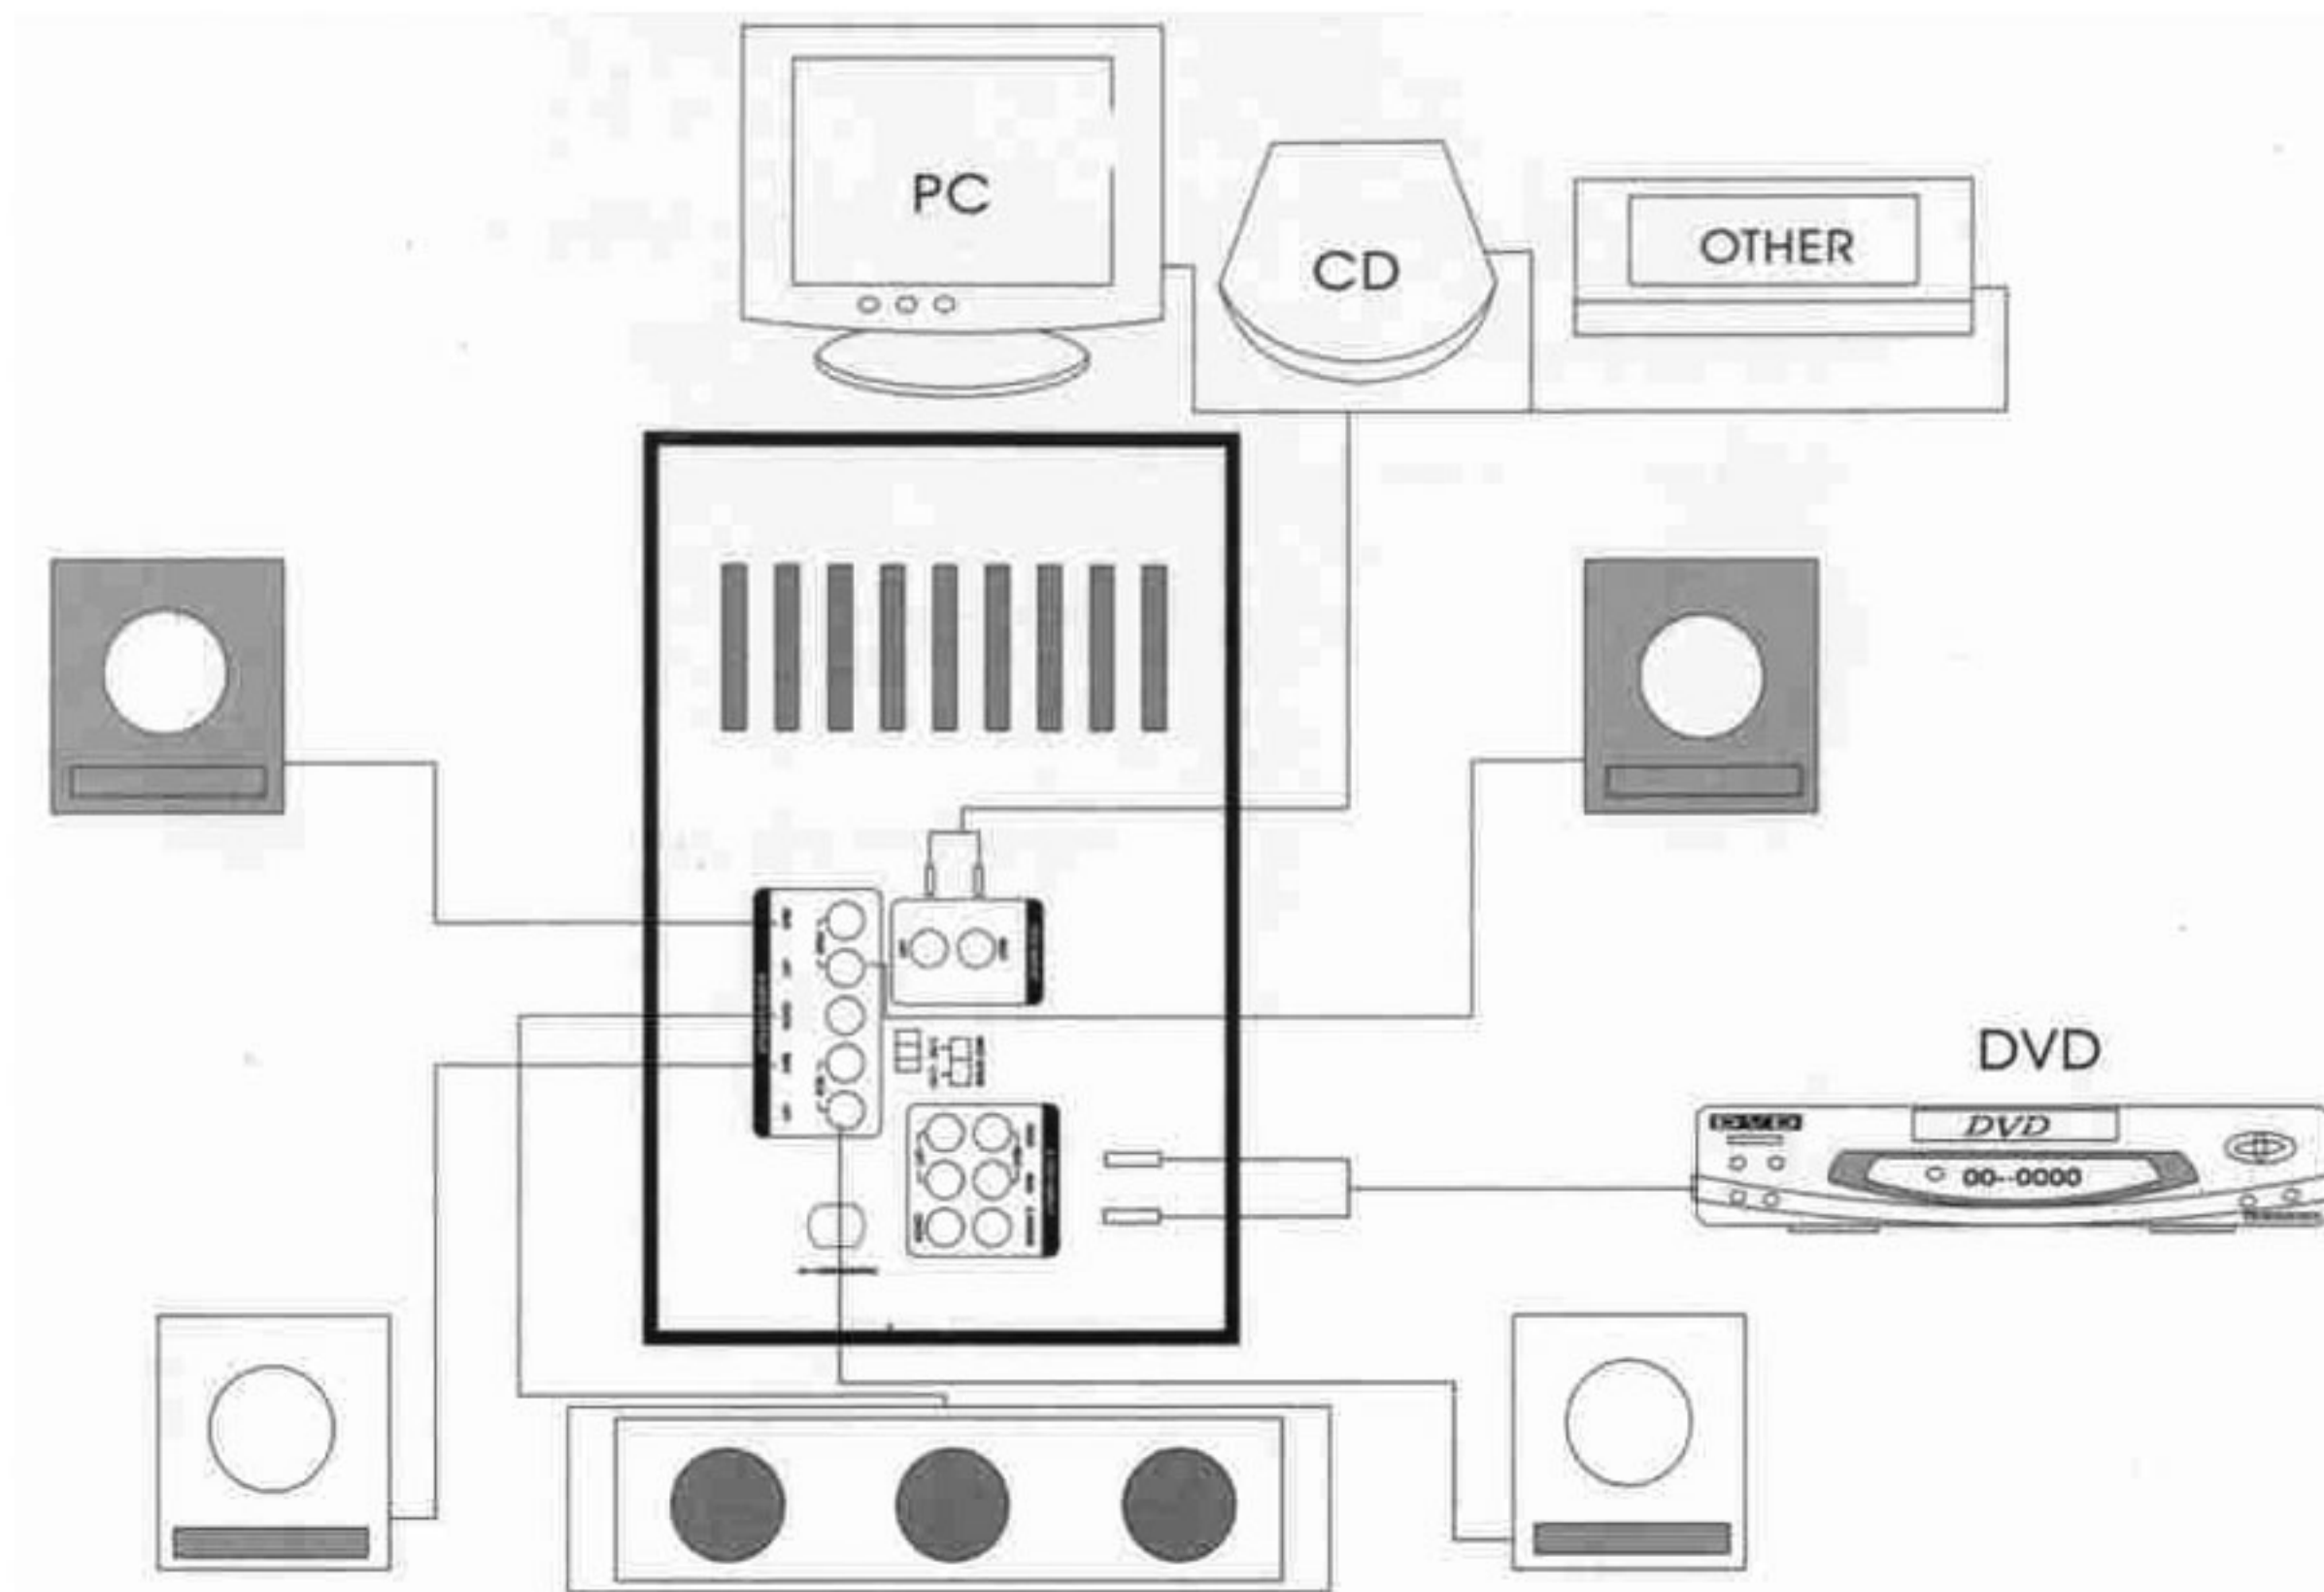

CONNECTING EQUIPMENT

Jacks and plugs of the connecting cord are color-coded as follows:

Red jacks and plugs: For the right channel of audio signals

White jack and plugs: For the left channel of audio signals

NOTE:

Insert the plugs fully into the jacks. Loose connections may produce a humming sound or other noise interference

IMPORTANT:

Connect the speakers and all other external equipment and lastly connect the AC power cord.

NOTE

Do not leave objects generating magnetism near the speakers.

NOTE

DTS surrounddol by prologic and dol by digital surround depends on DVD player or any one coder . This speaker system is providing 5.1 virtual surround sound effect.

OPERATING GUIDE.

Power-On

(Be sure to check the connections before you power on your system)

- 1 .Adjust all buttons to their minimum or lowest setting
- 2.Press the POWER button on the front panel, the red power indicator will light up
- 3.Adjust the front and center volume, the rear volume and the Subwoofer volume by tuning the appropriate buttons until you reach your desired effect.

Source in put

this function could ensure the shift of audio . You may choose each mode of 5.1.S.Vol and 2.1 by 5.1-2.1 Button on the back panel.

SPECIFICATIONS

Output power: subwoofer: 15W

front : 8Wx2

center : 8Wx1

rear : 8Wx2

Impedance : 6 OHM

drive unit : subwoofer: 4"

:front : 3"x2

:center : 3"

:rear : 3"x2

frequency response: 30Hz-20KHz

separation : $\geq 45\text{dB}$

S/N : $\geq 60\text{dB}$

power supply: \sim AC110V/220V 60Hz/50Hz